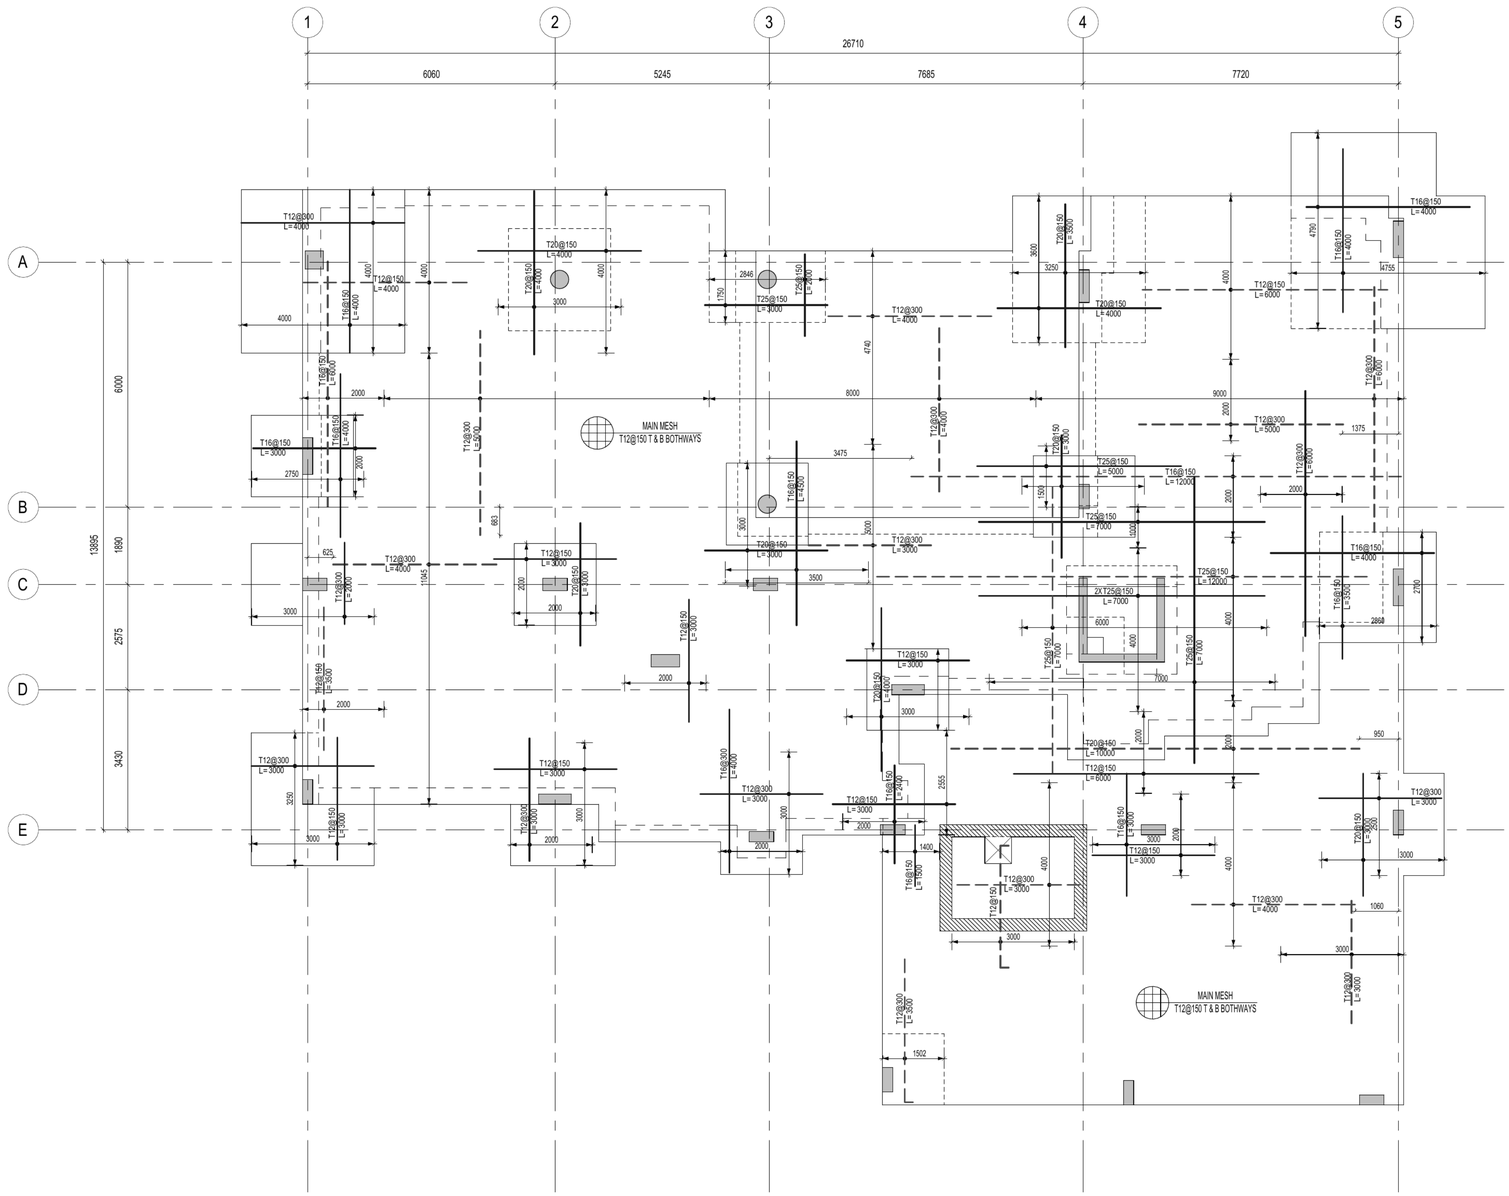


NOTE:

1. ALL OPENING LOCATIONS AND DIMENSIONS SHALL BE VERIFIED FROM ARCHITECTURAL DRAWINGS BEFORE CONSTRUCTION.

2. THE CONTRACTOR SHALL PRODUCE SHOP/WORKING DRAWINGS AND SCHEDULES AS NECESSARY FOR COMPLETION OF THE WORKS AND RECORD DRAWINGS OF THE AS BUILT WORKS, ALL FOR THE ENGINEER'S APPROVAL.

3. CONTRACTOR TO MAKE SURE THE CONSTRUCTION LOAD IS ALIGNED WITH DESIGN LOAD OR USE BACK PROPPING TO SUPPORT TO AVOID ANY ADDITIONAL LOAD MORE THAN THE DESIGN LOAD MAYBE AFFECT THE STRUCTURAL MEMBERS.

4. CONTRACTOR'S DETAILED SHOP DRAWINGS SHOULD COMPLY WITH APPROVED DRAWINGS AND ACI-318 DESIGN REQUIREMENTS.

5. CONTRACTOR DETAILED SHOP DRAWINGS TO BE FULLY COORDINATED WITH APPROVED DRAWINGS (STRUCTURAL, ARCHITECTURAL, MEP AND LANDSCAPE) AND TO BE SUBIMT FOR ENGINEER'S APPROVAL BEFORE ERECTION OF FORMWORK.

6. CONTRACTOR DETAILED SHOP DRAWIMGS CONCRETE DIMENSION TO BE APPROVED FROM ENGINEERS (STRUCTURAL, ARCHTIECTURAL, MEP AND LANDSCAPE) BEFORE ERECTION OF FORM WORK.

7. ALL STRUCTURAL DRAWINGS MUST BE COORDINATED WITH ARCHITECTURAL DRAWINGS BEFORE ERECTION OF FORMORK. ANY DISCRIPANCY MUST BE BROUGHT TO THE NOTICE OF THE ENGINEER FOR CLARIFICATION.

8. FOR COLUMNS & WALLS SCHEDULES AND DETAILS REFER TO DRAWING ST-610 & ST-611.

9.CONTRACTOR TO SUBMIT THE REQUIRED CALCULATIONS OF OPEN EXCAVATION SLOPE STABILITY FOR ENGINEERS' APPROVAL.

10. THE STRUCTURAL DRAWINGS SHALL BE READ IN CONJUNCTION WITH FAÇADE DRAWINGS, AND ALL FAÇADE REQUIREMENTS SHOULD BE CONSIDERED BEFORE FIXING THE REINFORCEMENT AND CONCRETE POURING.

11. CONTRACTOR SHALL FOLLOW ALL RECOMMENDATIONS AS PER SOIL REPORT BEFORE COMMENCEMENT OF WORK.

12. — — — - ADDITIONAL TOP REINF.

13. ——— - ADDITIONAL BOTTOM REINF.

14. BARS ARE CUT AT SITE TO SUIT THE LOCATION OF OPENINGS AND DISCONTINUOUS EDGES.

15. FOR ADDITIONAL REINFORCEMENT AND TRIMMER BARS AROUND OPENING REFER TO STANDARD DETAILS U.N.O.


16. ALL THE ADDITIONAL TOP REINFORCEMENT ARE CENTERED WITH COLUMNS / WALLS / GRIDLINES U.N.O

LEGEND:

- CONTINUOUS COLUMN
- TERMINATED COLUMN
- PLANTED COLUMN

1 / 400 GROUND FLOOR REINFORCEMENT PLAN

SCALE 1 : 75

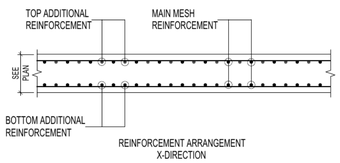

TYPICAL MESH AND ADDITIONAL REINFORCEMENT ARRANGEMENT

REDACTED FOR PUBLIC DEMO

ORIGINAL PAPER SIZE: A1 (841x594mm)